


CODE 1

MAIN BOOM



LOAD RADIUS (FT)	ANGLE	LOAD CAP. (LBS)	ANGLE	LOAD CAP. (LBS)	ANGLE	LOAD CAP. (LBS)	ANGLE	LOAD CAP. (LBS)	ANGLE	LOAD CAP. (LBS)	ANGLE	LOAD CAP. (LBS)	ANGLE	LOAD CAP. (LBS)	ANGLE	LOAD CAP. (LBS)	ANGLE	LOAD CAP. (LBS)	ANGLE	LOAD CAP. (LBS)	LOAD RADIUS (FT)	
LENGTH	38.5 FT	63 FT	74 FT	86 FT	97 FT	109 FT	120 FT	132 FT	143 FT	155 FT												
6	74°	100000																				6
8	71°	85400																				8
10	67°	75100	77°	40000																		10
12	64°	67000	75°	40000	78°	37700																12
15	59°	57600	73°	40000	76°	36340	79°	31000														15
20	49°	46200	68°	38250	72°	33380	75°	28200	78°	24120												20
25	38°	37400	63°	35040	68°	30620	72°	25970	75°	22200	77°	18000	79°	16260								25
30	23°	28590	57°	30700	63°	28020	68°	23950	71°	20480	74°	17000	77°	15280	78°	13500	80°	11500				30
35			52°	26440	59°	25790	64°	22080	68°	18670	72°	15920	74°	14270	76°	12900	78°	11300	79°	9000		35
40			45°	21870	54°	21870	61°	20370	65°	17210	69°	14700	72°	13310	74°	12000	76°	11000	77°	9000		40
45			38°	18860	49°	19110	57°	18740	62°	15920	66°	13570	69°	12410	72°	11300	74°	10460	76°	9000		45
50			30°	16140	43°	16420	52°	16610	58°	14720	63°	12540	66°	11600	69°	10550	72°	9460	74°	8800		50
55			17°	12420	37°	14190	48°	14390	54°	13620	60°	11580	64°	10840	67°	9610	70°	8880	72°	8320		55
60					29°	12330	43°	12540	50°	12630	56°	10690	61°	9960	65°	9000	68°	8330	70°	7820		60
65					19°	10020	37°	10960	46°	11100	53°	9870	58°	9230	62°	8430	65°	7800	68°	7340		65
70							31°	9600	42°	9750	49°	9150	55°	8550	59°	7880	63°	7300	66°	6880		70
75							23°	8340	37°	8570	46°	8480	52°	7930	57°	7390	61°	6820	64°	6410		75
80							8°	4360	31°	7530	42°	7650	48°	7340	54°	6880	58°	6360	62°	5980		80
85									24°	6610	37°	6740	45°	6790	51°	6360	56°	5940	59°	5560		85
90									12°	4130	32°	5930	41°	6010	48°	5870	53°	5540	57°	5170		90
95											26°	5190	37°	5280	45°	5350	50°	5160	55°	4780		95
100											17°	3830	32°	4630	41°	4700	47°	4740	52°	4430		100
105													26°	4030	37°	4110	44°	4160	50°	4110		105
110													19°	3030	33°	3560	41°	3620	47°	3660		110
115															28°	3060	37°	3120	44°	3170		115
120															22°	2470	33°	2670	41°	2710		120
125															12°	860	29°	2250	38°	2300		125
130																	23°	1800	34°	1910		130
135																			30°	1550		135
DEDUCTIONS FOR MAIN BOOM CAPACITIES	0°	15120	0°	6460	0°	4420	0°	2800	0°	1660	0°	680	0°	0	0°	0	0°	0	0°	0		
		960		590		500		430		390		340		310		280		260		240		STOWED
		2620		2270		2190		2130		2080		2050		2020		1990		1970		1950		FIXED

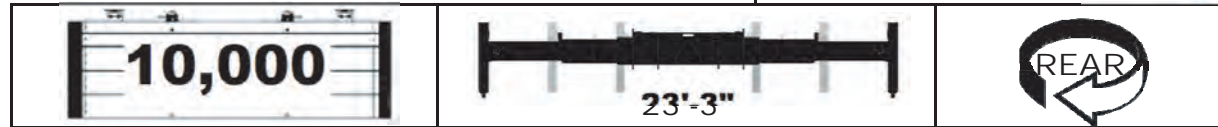

Contact your local dealer.
You can find your local dealer by scanning the QR Code.



3000 SOUTH AUSTIN AVENUE
GEORGETOWN, TEXAS 78626
TOLL FREE: 877-314-3390
MAIN OPERATOR: 512-942-3000



Manitex




TC50155X

"THE NEXT GENERATION"
TC Series Taxi Cranes

Capacity: 50 ton
Boom: 128' & 155'
Max Tip Height: 204 Feet

TC50155X

New self removeable counterweight system enhances roadability/transportability!

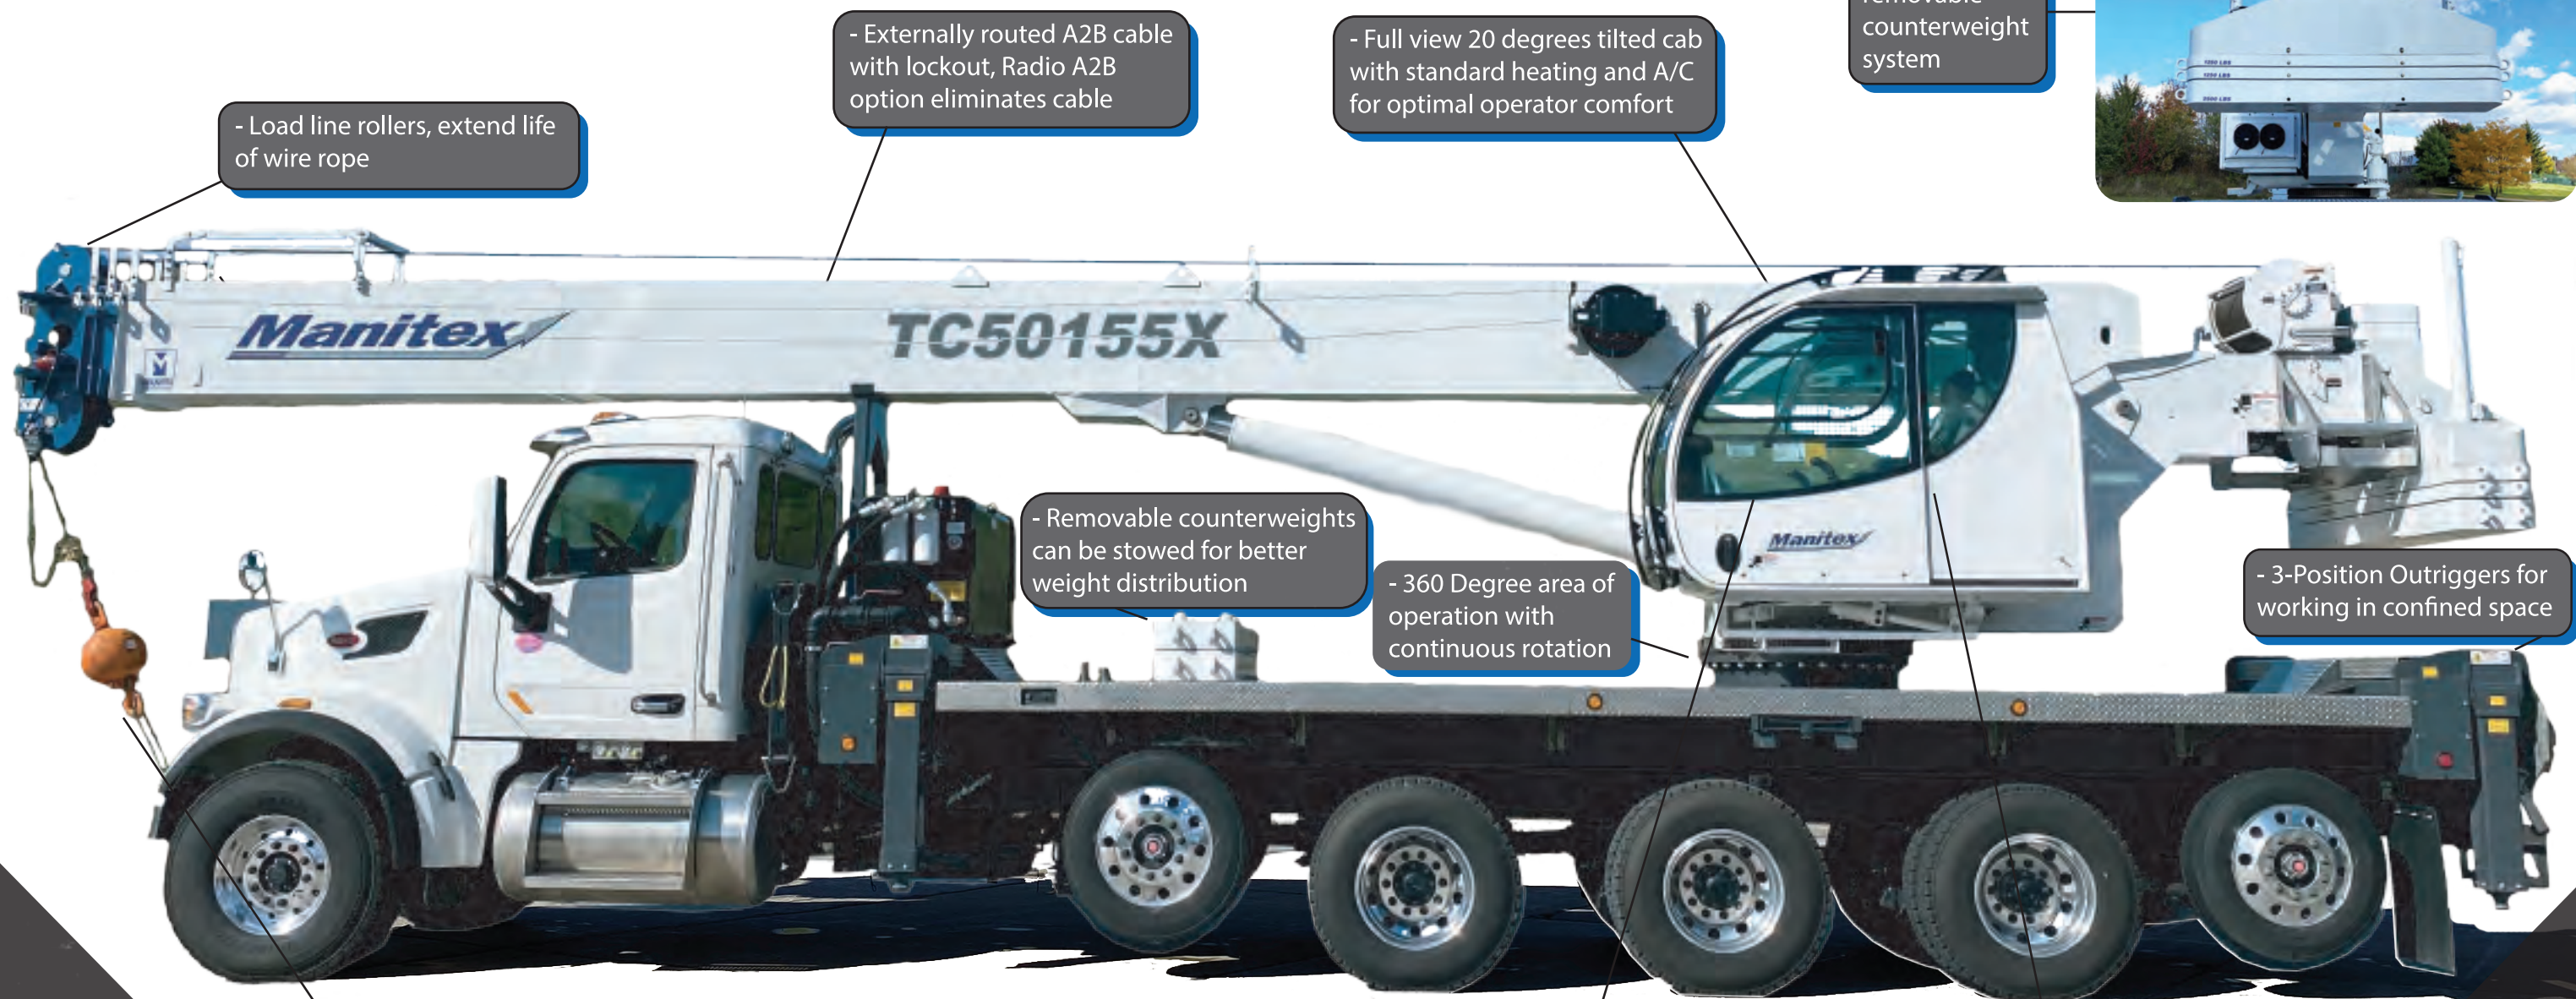

- Load line rollers, extend life of wire rope

- Externally routed A2B cable with lockout, Radio A2B option eliminates cable

- Full view 20 degrees tilted cab with standard heating and A/C for optimal operator comfort

- 10,000 lbs. removable counterweight system




- Removable counterweights can be stowed for better weight distribution

- 360 Degree area of operation with continuous rotation

- 3-Position Outriggers for working in confined space

- ROC Solid - Radio Remote controller for outrigger, winch and FBS setup


- A92.2 dual rating for lifting and manbasket applications

- Full color Load Moment Indicator display in cab with audio/visual alert and shutoff

- Hi-torq free swing and Non-free selection from the operators cab with electric over hydraulic controls